


CE





CEE 7/7II

A80 | 100.0% Φ: 600 lm



30 x 30 cm Φ: 600 lm


Em: 5010 lx
Emax: 28559 lx
Emin: 839 lx

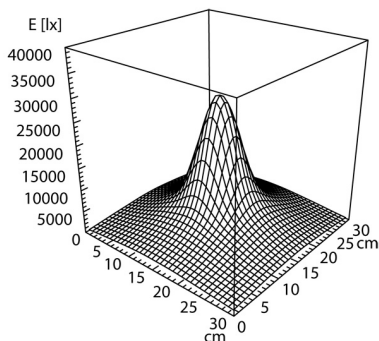

Light source	LED
Work equipment	Electronic ballast in housing
Connected load	100 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 9 W
Luminous flux	approx. 600 lm
Luminous efficiency ¹⁾	approx. 66 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 5.000 K
Color rendering index	CRI ≥ 80
Light distribution	Narrow-beam; Direct; Flexible metal tube; Black
Beam angle	10°
Chromaticity tolerance LED	< 4 SDCM
Glare control	Optics
Luminance (L65)	≤ 4.000 cd/m ²
Unified glare rating (4H 8H) ²⁾	≤ 16
System of protection	IP 20 [IP65]
Class of protection	I
Technology	Switchable; Continuously dimmable; -
Operation	Push button
Housing	Aluminium; Anodised; Black
Light source cover	Borosilicate
Mains lead	ca. 3,2 m; Mains plug; CEE 7/7II
Fastening	Table clamp (accessory); Wall bracket (accessory); Screw-down flange Not available
Add-on lens	
Maximum ambient temperature	25 °C
EAN	4013330088354
Weight (net)	ca. 3 kg
Special features	Spot

**Flexible-tube luminaire ROCIA.focus
RFF 600/850/D**

113183000-00668996

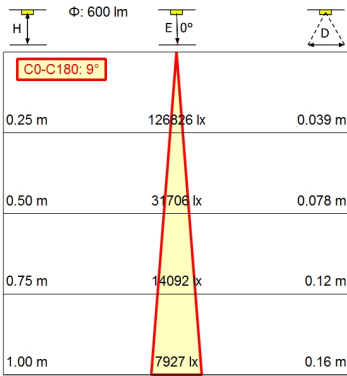

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear according to DIN EN 12464-1:2021

²⁾