

CE





CEE 7/XVI



BS 1363



NEMA 1-15P

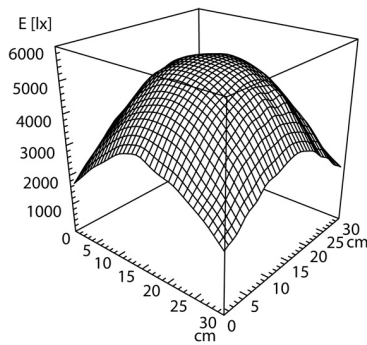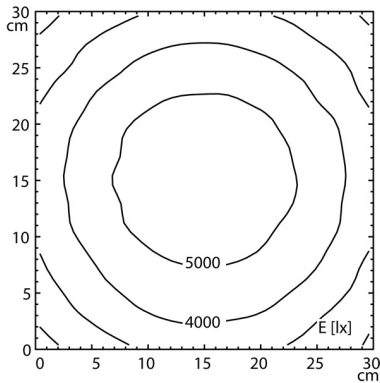

**Light source**

**Work equipment**

**Connected load**

**Secondary tension**

**Power consumption**

**Sec. power consumption**

**Luminous flux**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Direct ratio**

**Chromaticity tolerance LED**

**Glare control**

**System of protection**

**Class of protection**

**Technology**

**Operation**

**Emergency lighting**

**Housing**

**Light source cover**

**Mains lead**

**Fastening**

**Lens, dimensions**

**Lens material**

**Lens, diopters**

**EAN**

**Weight (net)**

**Special features**

LED

Electronic plug-in ballast

100 - 240 V; AC; 50 Hz; 60 Hz

24 V

ca. 13 W

ca. 11 W

approx. 750 lm

Cold white

approx. 4.000 K

CRI ≥ 90; R9 ≥ 50

Direct; Tubular aluminium section; Anodized;  
Aluminium coloured anodised  
approx. 100 %

< 3 SDCM

without

IP 20

II with plug-in power supply, III without plug-in  
power supply  
Multi-stage switchable; Continuously dimmable;  
Touch DIM; Spring  
Multi-function switch

none

Plastic; Untreated; Black

Polyamide; Milky

ca. 3,6 m; Mains plug; CEE 7/XVI; BS 1363; NEMA  
1-15P

Screw-down flange

Ø 160 mm

Glass

3,5; 3,5 DPT

4013330043049

ca. 2,5 kg

Light characteristic can be adjusted with a 3-way  
switch