
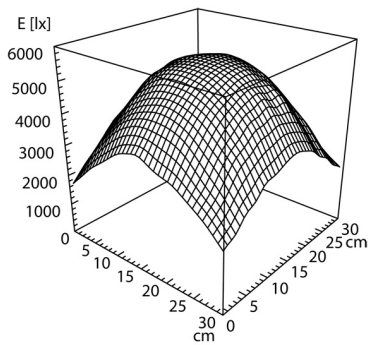
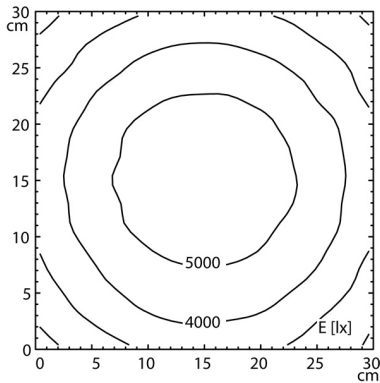


CE



Light source	LED
Work equipment	Electronic plug-in ballast
Connected load	100 - 240 V; AC; 50 Hz; 60 Hz
Secondary tension	24 V
Power consumption	ca. 13 W
Sec. power consumption	ca. 11 W
Luminous flux	approx. 750 lm
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 90; R9 ≥ 50
Light distribution	Direct; Tubular aluminium section; Anodized; Aluminium coloured anodised approx. 100 %
Direct ratio	
Chromaticity tolerance LED	< 3 SDCM
Glare control	without
System of protection	IP 20
Class of protection	II with plug-in power supply, III without plug-in power supply
Technology	Multi-stage switchable; Continuously dimmable; Touch DIM; Spring Multi-function switch
Operation	
Emergency lighting	none
Housing	Plastic; Untreated; Black
Light source cover	Polyamide; Milky
Mains lead	ca. 3,6 m; Mains plug: CEE 7/XVI; BS 1363; NEMA 1-15P
Fastening	Screw-down flange
Lens, dimensions	Ø 160 mm
Lens material	Glass
Lens, diopters	3,5; 3,5 DPT
Add-on lens	Not available
EAN	4013330043612
Weight (net)	ca. 2,5 kg
Special features	Antireflective magnifier; Light characteristic can be adjusted with a 3-way switch