


Free-standing luminaire YARA.single YAS 15000/840/R/SR/CEE/00/C

114268000-00808992


Waldmann W

ENGINEERS OF LIGHT

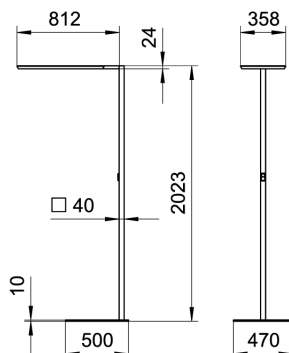

CEE 7/VII

D43 ↓ 13.0% ↑ 87.0%



Light source	LED
Work equipment	Electronic ballast DALI
Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 107 W; 107 W
Power factor	env. 0,966
Luminous flux	approx. 15.000 lm
Luminous efficiency ¹⁾	approx. 140 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect; Steel tube; Powder-coated; Tubular section upright; Silver metallic approx. 13 %
Direct ratio	< 3 SDCM
Chromaticity tolerance LED	Prism aperture
Glare control	≤ 2.700 cd/m ²
Luminance (L65)	≤ 16
Unified glare rating (4H 8H) ²⁾	IP 20
System of protection	I
Class of protection	Presence and daylight sensor control (PIR); -
Technology	Wireless switch
Operation	none
Emergency lighting	Aluminium/plastic; Powder coatet; Silver metallic
Housing	Acrylic (PMMA); Structured; Satine
Light source cover	C-form flat
Luminaire base	ca. 3 m; Mains plug; CEE 7/VII
Mains lead	Floor standing base
Fastening	L80B50 60.000h
Life expectancy LED	4013330097790
EAN	ca. 18 kg
Weight (net)	2.024 mm
Dimensions	Asymmetric radiation; Flicker-free; App control; Direct and indirect lighting component with edge light and light guide technology for a homogeneous light exit; PIR movement and daylight sensor; Magnetic control panel, freely positionable
Special features	

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear according to DIN EN 12464-1:2021

²⁾