
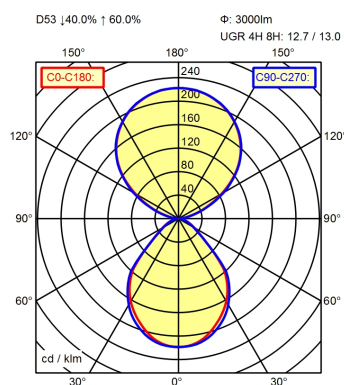


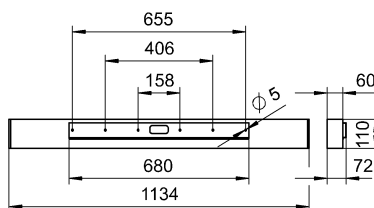

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Chromaticity tolerance LED

Glare control

Luminance (L65)

Unified glare rating (4H 8H) ²⁾

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight (net)

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,97

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect

approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

Connector

mounted version

Mounting rail

L90B50 50.000h

4013330081560

ca. 4,7 kg

Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear according to DIN EN 12464-1:2021

²⁾