


Wall-mounted luminaire ZERA.bed ZEW 7000/830

114488000-00813015


Waldmann **W**

ENGINEERS OF LIGHT

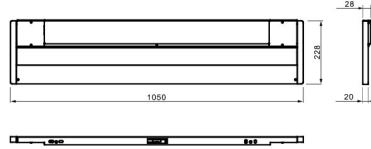

5 pin

D43 ↓24.6% ↑75.4% Φ: 6900 lm



Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

System of protection

Class of protection

Technology

Operation

Emergency lighting

Housing

Light source cover

Mains lead

Design

Fastening

Maximum ambient temperature

Life expectancy LED

EAN

Weight (net)

Dimensions

Special features

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 64 W

approx. 7.090 lm

approx. 110 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect

< 3 SDCM

Diffusor

IP 20

I

Switchable

Switch

none

Sectional aluminium; Anodised; Aluminium coloured anodised

Acrylic (PMMA); White opal

Connector; 5 pin

mounted version

Wall bracket

25 °C

L80B50 50.000h

4013330146344

ca. 6,9 kg

1.049,5 mm; 228 mm; 29 mm

General light, indirect, 3000K, Ra≥80; Night light; indirect; 2700K; Ra≥80; Reading light, direct, 3,00K, Ra≥80; DIN EN 60598-2-25

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear