
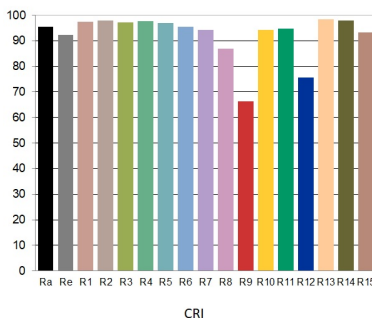
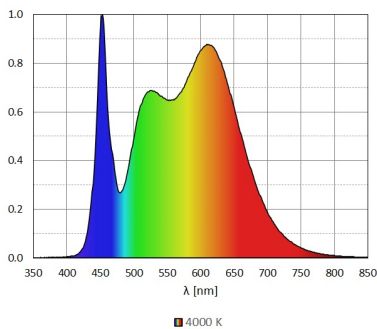


C53 | 44.6% ↑ 55.4%      Φ: 6400 lm  
UGR 4H 8H: 14.3 / 14.3



**Work equipment**  
**Connected load**  
**Power consumption**  
**Luminous flux**  
**Luminous efficiency <sup>1)</sup>**  
**Light type/-color**  
**Colour temperatur**  
**Color rendering index**  
**Light distribution**  
**Direct ratio**  
**Glare control**  
**Luminance (L65)**  
**Unified glare rating (4H 8H) <sup>2)</sup>**  
**System of protection**  
**Class of protection**  
**Technology**  
**Operation**  
**Emergency lighting**  
**Housing**  
**Light source cover**  
**Mains lead**  
**Fastening**  
**Maximum ambient temperature**  
**EAN**  
**Weight (net)**  
**Dimensions**  
**Special features**

Power supply unit  
220 - 240 V; 50 Hz; 60 Hz  
ca. 53 W  
approx. 6.400 lm  
approx. 120 lm/W  
Cold white  
approx. 4.000 K  
CRI ≥ 90; R9 ≥ 50  
Direct/indirect  
approx. 45 %  
optical film  
≤ 2.800 cd/m<sup>2</sup>  
≤ 16  
IP 20  
I  
DALI  
External  
none  
White  
Acrylic (PMMA); Satine  
Direct power supply; 5 pin  
Ceiling mounted  
25 °C  
4013330151959  
ca. 4,9 kg  
48 mm  
Separated, direct and indirect light individually adjustable; DALI Load 2x; Suitable as emergency lighting

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear  
<sup>2)</sup> according to DIN EN 12464-1:2021