
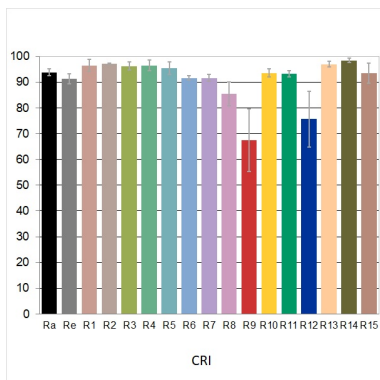
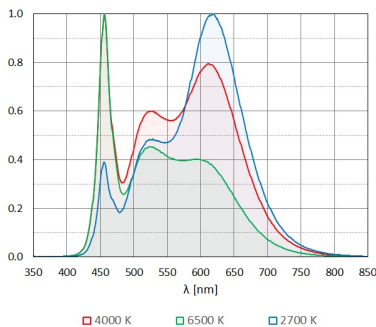


C53 | 41.1% ↑ 58.9% Φ: 6700 lm
UGR 4H 8H: 14.1 / 14.1



¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear
²⁾ according to DIN EN 12464-1:2021

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Glare control

Luminance (L65)

Unified glare rating (4H 8H) ²⁾

System of protection

Class of protection

Technology

Operation

Emergency lighting

Housing

Light source cover

Mains lead

Fastening

Maximum ambient temperature

EAN

Weight (net)

Special features

Power supply unit

220 - 240 V; 50 Hz; 60 Hz

ca. 61 W

approx. 6.700 lm

approx. 109 lm/W

adjustable white

approx. 2.700 - 6.500 K

CRI ≥ 90; R9 ≥ 50

Direct/indirect

approx. 40 %

optical film

≤ 2.800 cd/m²

≤ 16

IP 20

I

DALI

External

none

White

Acrylic (PMMA); Satine

Direct power supply; 5 pin

Ceiling mounted

25 °C

4013330151980

ca. 4,9 kg

Separated, direct and indirect light individually adjustable; External control device required for DALI Device Type 6; Biodynamic light VTL; Specified values at approx. 4000 K