


# Wall-mounted luminaire ZERA.bed ZEW 9000/830/D


114494000-00812997

**Waldmann** **W**

ENGINEERS OF LIGHT

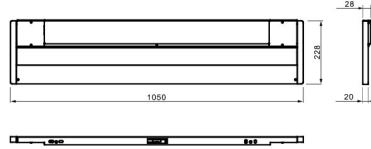

D43 ↓31.5% ↑68.5%      Φ: 7600 lm



<b>Work equipment</b>	Power supply unit
<b>Connected load</b>	220 - 240 V; AC; 50 Hz; 60 Hz
<b>Power consumption</b>	ca. 86 W
<b>Luminous flux</b>	approx. 8.500 lm
<b>Luminous efficiency <sup>1)</sup></b>	approx. 98 lm/W
<b>Light type/-color</b>	Warm white
<b>Colour temperatur</b>	approx. 3.000 K
<b>Color rendering index</b>	CRI ≥ 80
<b>Light distribution</b>	Direct/indirect
<b>Chromaticity tolerance LED</b>	< 3 SDCM
<b>Glare control</b>	Diffusor
<b>System of protection</b>	IP 20
<b>Class of protection</b>	I
<b>Technology</b>	Switchable
<b>Emergency lighting</b>	none
<b>Housing</b>	Sectional aluminium; Anodised; Aluminium coloured anodised
<b>Light source cover</b>	Acrylic (PMMA); White opal
<b>Mains lead</b>	Connector; 5 pin
<b>Design</b>	mounted version
<b>Fastening</b>	Wall bracket
<b>Maximum ambient temperature</b>	25 °C
<b>Life expectancy LED</b>	L80B50 50.000h
<b>EAN</b>	4013330146191
<b>Weight (net)</b>	ca. 6,9 kg
<b>Dimensions</b>	1.049,5 mm; 228 mm; 29 mm
<b>Special features</b>	General light, indirect, 3000K, Ra≥80; Reading light, direct, 2700K, Ra≥90; Examination light; direct; 4000K; 36W; Ra≥95; R9≥50; DIN EN 60598-2-25; DALI Load 3x

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g