
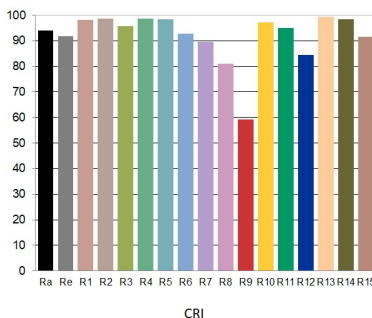
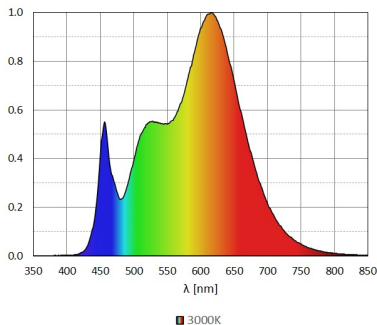


5 pin

C53 | 49.1% ↑ 50.9% Φ: 10200 lm
UGR 4H 8H: 14.6 / 14.6



Work equipment
Connected load
Power consumption
Luminous flux
Luminous efficiency ¹⁾
Light type/-color
Colour temperatur
Color rendering index
Light distribution
Direct ratio
Glare control
Luminance (L65)
Unified glare rating (4H 8H) ²⁾
Class of protection
Technology
Operation
Emergency lighting
Housing
Light source cover
Mains lead
Fastening
Maximum ambient temperature
EAN
Weight (net)
Special features

Power supply unit
220 - 240 V; 50 Hz; 60 Hz
ca. 85 W
approx. 10.200 lm
approx. 120 lm/W
Warm white
approx. 3.000 K
CRI ≥ 90; R9 ≥ 50
Direct/indirect
approx. 50 %
optical film
≤ 2.600 cd/m²
≤ 16
I
DALI
External
none
White
Acrylic (PMMA); Satine
Direct power supply; 5 pin
Ceiling mounted
25 °C
4013330152000
ca. 6,9 kg
Separated, direct and indirect light individually adjustable; DALI Load 2x; Suitable as emergency lighting

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear
²⁾ according to DIN EN 12464-1:2021