


# Wall-mounted luminaire ZERA.bed ZEW 7000/830/D

114500000-00813017


# Waldmann **W**

ENGINEERS OF LIGHT

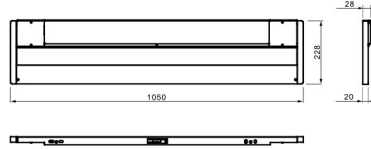

5 pin

D43 ↓24.6% ↑75.4%    Φ: 6900 lm



|  |   |
|--|---|
| <b>Work equipment</b>                    | Power supply unit   |
| <b>Connected load</b>                    | 220 - 240 V; AC; 50 Hz; 60 Hz   |
| <b>Power consumption</b>                 | ca. 61 W  |
| <b>Luminous flux</b>                     | approx. 6.900 lm  |
| <b>Luminous efficiency <sup>1)</sup></b> | approx. 113 lm/W  |
| <b>Light type/-color</b>                 | Warm white  |
| <b>Colour temperatur</b>                 | approx. 3.000 K   |
| <b>Color rendering index</b>             | CRI ≥ 80  |
| <b>Light distribution</b>                | Direct/indirect   |
| <b>Chromaticity tolerance LED</b>        | < 3 SDCM  |
| <b>Glare control</b>                     | Diffusor  |
| <b>System of protection</b>              | IP 20   |
| <b>Class of protection</b>               | I   |
| <b>Technology</b>                        | Switchable  |
| <b>Emergency lighting</b>                | none  |
| <b>Housing</b>                           | Sectional aluminium; Anodised; Aluminium coloured anodised  |
| <b>Light source cover</b>                | Acrylic (PMMA); White opal  |
| <b>Mains lead</b>                        | Connector; 5 pin  |
| <b>Design</b>                            | mounted version   |
| <b>Fastening</b>                         | Wall bracket  |
| <b>Maximum ambient temperature</b>       | 25 °C   |
| <b>Life expectancy LED</b>               | L80B50 50.000h  |
| <b>EAN</b>                               | 4013330146368   |
| <b>Weight (net)</b>                      | ca. 6,9 kg  |
| <b>Dimensions</b>                        | 1.049,5 mm; 228 mm; 29 mm   |
| <b>Special features</b>                  | General light, indirect, 3000K, Ra≥80; Reading light, direct, 3,00K, Ra≥80; General light and night light DALI; DIN EN 60598-2-25 |

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g