


CEE 7/VII

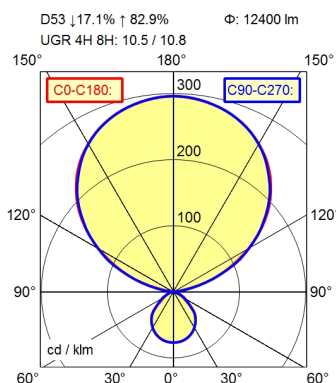

**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Standby**

**Power factor**

**Luminous flux**

**Luminous efficiency <sup>1)</sup>**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Direct ratio**

**Chromaticity tolerance LED**

**Glare control**

**Luminance (L65)**

**Unified glare rating (4H 8H) <sup>2)</sup>**

**System of protection**

**Class of protection**

**Technology**

**Operation**

**Emergency lighting**

**Housing**

**Light source cover**

**Luminaire base**

**Mains lead**

**Fastening**

**Decorative contrast side parts**

**Life expectancy LED**

**EAN**

**Weight (net)**

**Dimensions**

**Special features**

LED

Electronic ballast DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 85 W

ca. 0,3 W

env. 0,973

approx. 12.400 lm

approx. 145 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; Steel tube; Painted; Tubular section upright; White approx. 17 %

< 3 SDCM

Prism aperture

≤ 3.000 cd/m<sup>2</sup>

≤ 16

IP 20

I

Presence and daylight sensor control (PIR); DALI; Touch DIM  
Rocker switch

none

Steel/plastic; Painted; White

Polycarbonate (PC); Clear

C-form flat

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

Flint grey

L80B50 50.000h

4013330143091

ca. 14,7 kg

2.033 mm

Integrated light and presence sensor PIR; Flicker-free; Motion sensor time-out of 15mins~; Luminaire head detachable; Direct and indirect light switchable together

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g  
<sup>2)</sup> according to DIN EN 12464-1:2021