


CEE 7/VII

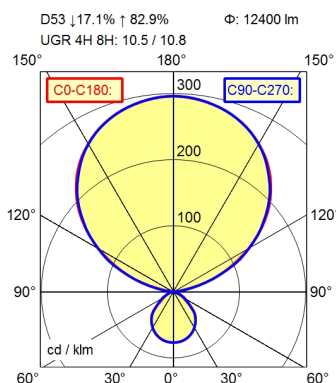

#### Light source

#### Work equipment

#### Connected load

#### Power consumption

#### Standby

#### Power factor

#### Luminous flux

#### Luminous efficiency <sup>1)</sup>

#### Light type/-color

#### Colour temperatur

#### Color rendering index

#### Light distribution

#### Direct ratio

#### Chromaticity tolerance LED

#### Glare control

#### Luminance (L65)

#### Unified glare rating (4H 8H) <sup>2)</sup>

#### System of protection

#### Class of protection

#### Technology

#### Operation

#### Emergency lighting

#### Housing

#### Light source cover

#### Luminaire base

#### Mains lead

#### Fastening

#### Decorative contrast side parts

#### Life expectancy LED

#### EAN

#### Weight (net)

#### Dimensions

#### Special features

LED

Electronic ballast DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 85 W

ca. 0,3 W

env. 0,973

approx. 12.400 lm

approx. 145 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; Steel tube; Painted; Tubular section upright; Silver metallic approx. 17 %

< 3 SDCM

Prism aperture

≤ 3.000 cd/m<sup>2</sup>

≤ 16

IP 20

I

Presence and daylight sensor control (PIR); DALI; Touch DIM  
Rocker switch

none

Steel/plastic; Painted; Silver metallic

Polycarbonate (PC); Clear

C-form flat

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

Metallic silver

L80B50 50.000h

4013330143077

ca. 14,7 kg

2.033 mm

Integrated light and presence sensor PIR; Flicker-free; Motion sensor time-out of 15mins~; Luminaire head detachable; Direct and indirect light switchable together

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g  
<sup>2)</sup> according to DIN EN 12464-1:2021