


CEE 7/VII

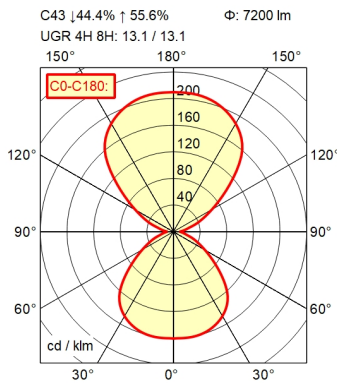

**Work equipment**

**Connected load**

**Power consumption**

**Luminous flux**

**Luminous efficiency <sup>1)</sup>**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Direct ratio**

**Chromaticity tolerance LED**

**Glare control**

**Luminance (L65)**

**Unified glare rating (4H 8H) <sup>2)</sup>**

**System of protection**

**Class of protection**

**Technology**

**Operation**

**Emergency lighting**

**Housing**

**Light source cover**

**Luminaire base**

**Mains lead**

**Fastening**

**EAN**

**Weight (net)**

**Dimensions**

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 79 W

approx. 7.200 lm

approx. 91 lm/W

Cold white

approx. 4.000 K

CRI  $\geq$  90

Direct/indirect; Steel tube; Painted; Tubular section upright; Anthracite grey

approx. 44 %

< 3 SDCM

Diffusor

$\leq$  1.600 cd/m<sup>2</sup>

$\leq$  16

IP 20

I

Continuously dimmable; DALI

Pull cord

none

Polyethylene(PE); Untreated; Anthracite

Polycarbonate (PC); Satine

Round (flat)

ca. 2,2 m; Mains plug; CEE 7/VII

Floor standing base

4013330147600

ca. 12,3 kg

1.660 mm

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear according to DIN EN 12464-1:2021

<sup>2)</sup>