
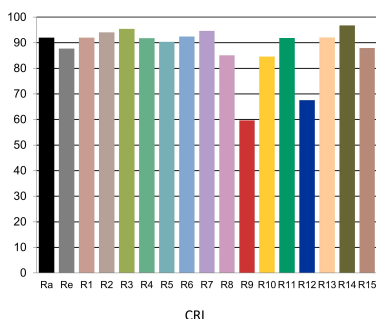
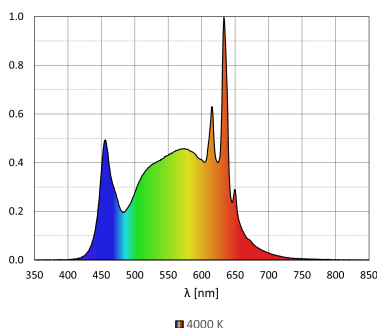
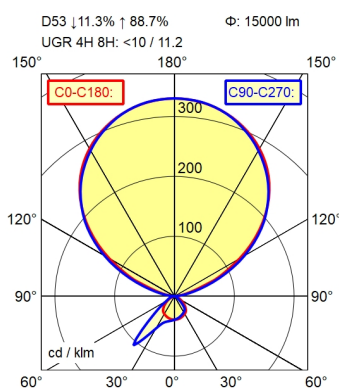


Free-standing luminaire LAVIGO.single TALK DPS 15000/940/R/WS/CEE/S0/C/G3

121865000-00816451

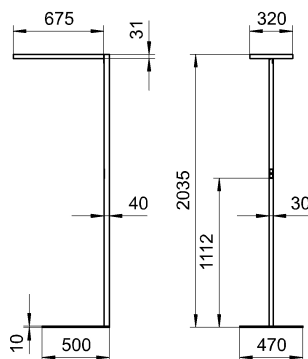

Work equipment
Connected load
Power consumption
Luminous flux
Luminous efficiency ¹⁾
Light type/color
Colour temperatur
Color rendering index
Light distribution
Chromaticity tolerance LED
Glare control
Luminance (L65)
UGR class (4H 8H; EN 12464-1)
System of protection/Class
Technology
Operation
Housing
Light source cover
Arm
Luminaire base
Mains lead
Fastening
Decorative contrast side parts
Life expectancy LED
Energy efficiency class
EPREL number of lightsources
EAN
Weight without/incl. packaging
Special features

Electronic ballast
220 - 240 V; AC; 50 Hz; 60 Hz
ca. 90 W
approx. 15.000 lm
approx. 166 lm/W
Cold white
approx. 4.000 K
CRI ≥ 90; R9 ≥ 50
Direct/indirect
< 3 SDCM
Prism aperture
≤ 3.000 cd/m²
≤ 16
IP 20; I
Presence and daylight sensor control (PIR)
Multi-function switch
Steel/plastic; Powder coatet; White
Acrylic (PMMA); Structured
Steel tube; Powder-coated; Tubular section
upright; White
C-form
ca. 3 m; Mains plug; CEE 7/VII
Floor standing base
Jet black
L80B50 60.000h
B; C
2226196; 2226239
4013330191092
ca. 18,3 kg
Swarm control; Integrated light and presence
sensor PIR; Asymmetric radiation; Separated, direct
and indirect light individually adjustable; Flicker-
free; Cradle to Cradle Certified TM; Direct light
component with edge light and light-guide
technology for homogenous light exit; App control;
TALK Bluetooth

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g