


CEE 7/XVI

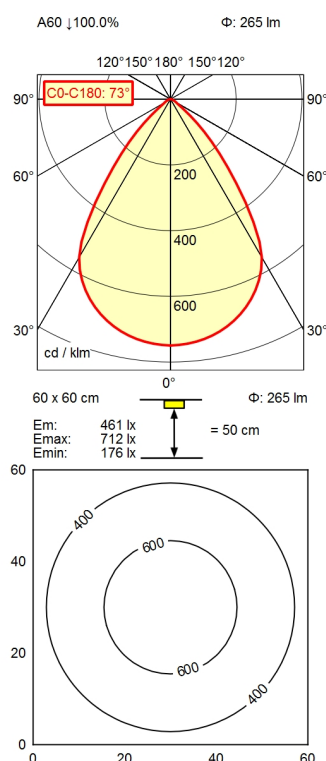

#### Light source

#### Work equipment

#### Connected load

#### Secondary tension

#### Power consumption

#### Sec. power consumption

#### Standby

#### Power factor

#### Luminous flux

#### Luminous efficiency <sup>1)</sup>

#### Light type/-color

#### Colour temperatur

#### Color rendering index

#### Light distribution

#### Direct ratio

#### Beam angle

#### Chromaticity tolerance LED

#### Glare control

#### System of protection

#### Class of protection

#### Technology

#### Operation

#### Emergency lighting

#### Housing

#### Light source cover

#### Mains lead

#### Fastening

#### Energy efficiency class

#### EAN

#### Weight (net)

#### Special features

LED module

Electronic plug-in transformer

100 - 240 V; AC; 50 Hz; 60 Hz

5 V

ca. 4 W

ca. 3,5 W

ca. 0,3 W

env. 0,97

approx. 265 lm

approx. 85 lm/W

Warm white

approx. 3.000 K

CRI  $\geq$  80

Direct; Tubular aluminium section; Anodized;

Tubular section upright; Titanium

approx. 100 %

73°

< 3 SDCM

Optics

IP 20

II with plug-in power supply, III without plug-in power supply

Continuously dimmable; DC control signal; Friction

Push button

none

Plastic; Untreated; Umbra grey

Polycarbonate (PC); Satine

ca. 1,85 m; Mains plug; CEE 7/XVI

Adaptor (accessory); Table clamp (accessory); Table base

E

4013330118709

ca. 1 kg

Push button in luminaire head

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g