


Wall-mounted luminaire ZERA.bed ZEW 9000/VTL/D

114492000-00812998

Waldmann **W**


ENGINEERS OF LIGHT

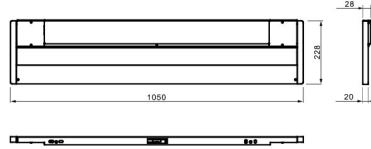

CE UK

5 pin

D43 ↓30.8% ↑69.2% Φ: 7800 lm



Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

System of protection

Class of protection

Technology

Emergency lighting

Housing

Light source cover

Mains lead

Design

Fastening

Maximum ambient temperature

Life expectancy LED

EAN

Weight (net)

Dimensions

Special features

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 95 W

approx. 8.890 lm

approx. 93 lm/W

adjustable white

approx. 3.000 - 6.500 K

CRI ≥ 80

Direct/indirect

< 3 SDCM

Diffusor

IP 20

I

Switchable

none

Sectional aluminium; Anodised; Aluminium

coloured anodised

Acrylic (PMMA); White opal

Connector; 5 pin

mounted version

Wall bracket

25 °C

L80B50 50.000h

4013330146245

ca. 6,9 kg

1.049,5 mm; 228 mm; 29 mm

General light, indirect, 3000K-6500K, Ra≥80;
Reading light, direct, 2700K, Ra≥90; Examination
light; direct; 4000K; 36W; Ra≥95; R9≥50; DIN EN
60598-2-25; External control device required for
DALI Device Type 6; Biodynamic light VTL

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear